

# WEAPONS SYSTEM Military & Law Enforcement Products








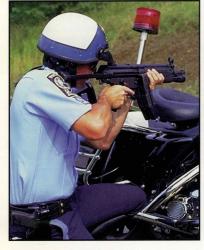


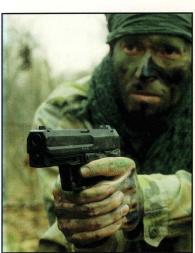

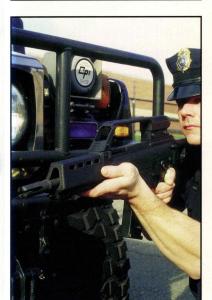

**HECKLER & KOCH** 

21480 Pacific Boulevard • Sterling, Virginia 20166 U.S.A. • Tel (703) 450-1900 • Fax (703) 450-8160

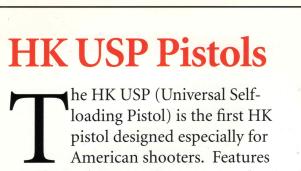

loading Pistol) is the first HK pistol designed especially for American shooters. Features favored by US law enforcement and military users provided the design criteria for the USP. Its controls are uniquely American, influenced by such famous designs as the Government Model 1911 pistol.

The control lever, a combination safety and decocking lever, is frame mounted and quickly accessible, unlike the slide mounted safeties common on

many semi-automatic

pistols.

Using a modified Browning-type action with a special patented recoil reduction system, the USP is built to take the punishment of powerful +P and +P+ loads. The recoil reduction system

reduces recoil effects on pistol components and also lowers the recoil forces felt by the shooter. The USP recoil reduction system is insensitive to ammunition types and requires no special adjustment or maintenance. It functions effectively in all USP models.

By using a modular approach to the internal components, the control lever function of the USP can be switched from the left to the right side of the pistol for left-handed shooters. The USP can also be converted from one type of trigger firing mode to another. This includes combination double-action and single-action (DA/SA) modes and double action only (DA-Only) modes. The USP is available in both standard frame and compact models with nine trigger/firing mode configurations and three calibers—.45 ACP, .40 S&W, and 9mm. USP slides are available in both matte black and stainless steel.

Major metal components on the USP are protected from wear and corrosion by HK's special Hostile Environment (HE) finish. Stainless steel models of the USP and are also available. Polygonal bore profile for increased velocity, easier cleaning, and longer barrel life Patented recoil reduction system was tested and proven in the HK MK 23, MOD 0 semi-automatic The ambidextrous magazine release pistol issued to the US Special lever is shielded by the trigger guard Operations Command. from inadvertent actuation. It can be

easily operated using the thumb or index finger without adjusting the

with 15-round polymer magazine

grip of the firing hand.

**USP9 CALIBER 9MM** 

**USP45 CALIBER .45 ACP** 

with 12-round metal magazine

Universal mounting grooves for installing accessories

One-piece machined steel slide

Three-dot sights (optional

tritium sights available


USP40 CALIBER .40 Sawith 13-round polymer magazine

Reinforced polymer frame. HK pioneered the use of composite

materials in production handsumore than twenty-five years ago

with the development of the

VP70Z and P9S pistols.

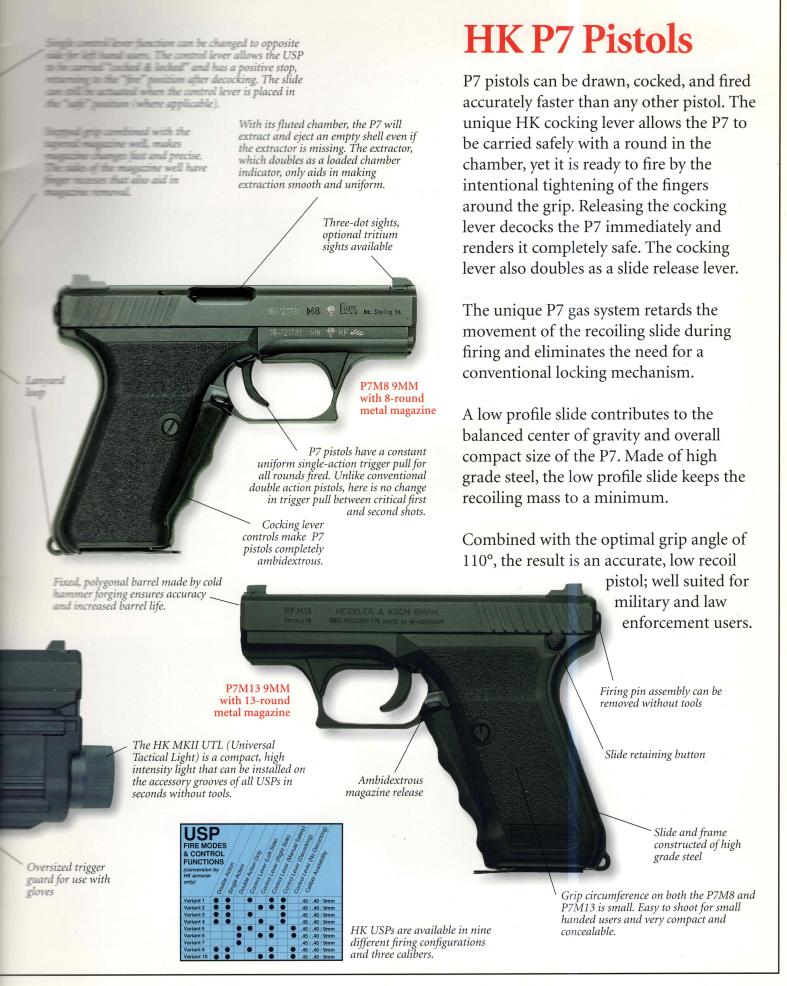

#### **HK Mark 23 Pistol**

The HK Mark 23 Caliber.45 ACP pistol gives shooters match grade accuracy equal to that of the finest custom made handguns—yet they exceed the most stringent operational requirements ever demanded of a combat handgun.

The Mark 23 provides this accuracy without the need for hand-fitted parts common in custom-built match pistols costing thousands of dollars more.

One of the most thoroughly tested handguns in history, the MK23/Mark 23 project originated in 1991 when HK began development for the U.S. Special Operations Command, the unit that directs the activities of America's most elite military units, including the Navy SEALs and the Army Special Forces.

On May 1, 1996, the first MK 23 pistols were delivered to the U.S. Special Operations Command for operational deployment, making the MK 23 the first caliber .45 ACP pistol to enter U.S. military service since the venerable Government Model 1911A1.

MARK 23 .45 ACP with suppressor, laser aiming module, and 12-round metal magazine The HK Mark 23 is a military and law enforcement model of the U.S. Government issue MK 23, MOD 0 Offensive Handgun and is available in limited numbers. Designated the "Mark 23", it is almost identical to the MK 23, MOD 0 pistol used by the Special Operations Command, right down to its threaded barrel. The principal differences are slide inscriptions (Mark 23 as opposed to MK 23) and a barrel manufactured to SAAMI headspace specifications.

One-piece machined steel slide

HK polygonal bore profile increases muzzle velocity and service life, while reducing bore fouling and eases cleaning.

Molded into the frame are special accessory grooves for attaching a light or laser aimer.

> A threaded insert in the trigger guard is used to secure accessories to the pistol.

> > MARK 23 .45 ACP with 12-round metal magazine (MK23 USSOCOM Issue Pistol NSN: 1005-01-426-8951)

The weapon is aimed using either iron sights or an optional laser aiming module. The iron sights provide a 3-dot sight picture with white or optional self-luminous tritium dots and are positioned to allow sight alignment with the optional sound & flash suppressor attached.

Military and law enforcement 12-round steel magazine

The USP-type mechanical recoil reduction system reduces recoil forces to the shooter and components of the pistol by as much as 30%.



#### was from the ambalectrous safety lever. It the lummer to be lowered quietly and num the ample action position. When the and when is locked in the fire position a that the result is always ready for double action morning. When the hummer is "cocked and something action made with the safety are me the decorder is blocked so that the many a summer ready for single action operation.

### **HK USP45 Tactical Pistol**

An enhanced version of the USP45, the Tactical is designed for users who need the features found on the Mark 23, but in a smaller and more affordable pistol. The USP45 Tactical pistol approaches the precision found on the Mark 23 by adding an extended threaded barrel with rubber O-ring, adjustable trigger, and adjustable target-type sights to the USP45.

Threaded barrel for use with a sound suppressor (available from HK).

An innovative design feature found on both the

centers the barrel in the slide until unlocking of

the barrel. The O-ring has a significant effect on accuracy, lasts more 20,000 rounds, and can

Mark 23 and USP45 Tactical pistol is a high

temperature rubber O-ring that seals and

be replaced without tools in seconds.

these operational environments.

High profile front sight permits normal sight alignment with sound suppressor mounted

Extractor (opposite side) doubles as a loaded chamber indicator.

.45 Auto

Rear target sight features micrometer adjustment for windage and elevation. Fixed 3-dot or tritium sights available as an option.

The enterniled slide release lever and the ambideatorus magazine whose are easily actuated without adjustment of the firing grid using the firing hand thumb

The with the water ever engaged to the second and then the pistol.

> Universal mounting grooves for installing accessories like the HK UTL weapons light and laser aimer

USP45 TACTICAL .45 ACP with 12-round metal magazine

> Improved match single-action and double-action trigger pull with adjustable trigger stop to eliminate overtravel

12-round magazine with extended floorplate for optimal grip and weapon retention

Match grade

trigger passes 1.5 meter

requirement.

drop test

Lanyard loop

USP45 Tactical pistols use the same patented recoil reduction system found on the full frame USP and the Mark 23. When the pistol is fired, the impulse of the rearward traveling barrel and slide are effectively buffered, eliminating the direct transmission of recoil forces to the pistol's frame and the shooter's hand.

To meet operational environmental requirements, the pistol was function tested at +140 and -25° F, exposed to 2 hours of submersion in sea water at 66 feet, placed in surf, salt-fog, sand-dust, mud, icing, unlubricated, and fouled environments. A special maritime surface coating protected the pistol from any corrosion, in all of

Sound and flash suppressor does not interfere with iron sights or LAM and can be adjusted to compensate for point of aim/point of impact deviations. By adding water to the unit, it provides an extraordinary 33-35 dB sound reduction and can be indexed to any MK 23 to eliminate point-of-impact changes when attached. Suppressor developed by Knight Armament Corp. of Vera Beach, FL for the U.S. Special Operations Command.

During testing, MK 23 pistols met the most stringent operational and accuracy requirements ever demanded of a combat handgun. Endurance testing demonstrated a service life of over 30,000 rounds of +P ammunition. To meet the reliability requirement, the pistol had to demonstrate a minimum of 2,000 mean rounds between stoppages (MRBS) with both M1911 ball and +P ammunition. All pistols exceeded the 2,000 MRBS with an average of 6,000 MRBS. In more than 450 accuracy test firings from a precision firing fixture, MK 23 pistols far exceeded the government requirement, averaging 1.44 inches, with 65 groups of less than one inch. There were four groups of .5 inches, with 5 rounds going through the same hole!

#### **HK Submachine Guns**

Heckler & Koch MP5 submachine guns employ the same delayed blowback operated roller-locked bolt system found in the famous HK G3 Automatic Rifle. All the elements of HK excellence; reliability, ease of handling, simple maintenance, and safety are highlighted on the MP5. Firing from the closed-bolt position during all modes of fire makes MP5 submachine guns extremely accurate and controllable.

Used by military and law enforcement units in more than fifty nations, the MP5 is firmly established as the world's preeminent submachine gun. Over 120 variants of the HK MP5 submachine gun are available to address the widest range of tactical requirements. A selection of optional trigger groups allow for single fire only, full automatic, 2-round, and 3-round burst options. The weapon's unique modular design and a variety of optional buttstocks, forearms, sight mounts, and other accessories gives the MP5 extraordinary flexibility to meet most any mission requirement.



SEF and Numerical trigger groups have a single safety/selector lever on the left side, all other groups have safety/selector levers on both sides.

semi-automatic safe

two-round burst

S safe

single fire (semi-automatic)

20/25 fully automatic

three-round bursts semi-automatic

safe

fully automatic

ক্তা জা



## **HK Submachine Guns (continued)**

Developed especially for one of America's most elite special operations units, the MP5 "Navy" model comes standard with an ambidextrous trigger group and threaded barrel. Operationally tested and proven, this configuration represents the essence of the modern submachine gun.

For specialized applications requiring fully realized sound and flash suppression, several MP5SD models are available. The removable sound suppressor is integrated into the weapon's design and conforms to the normal length and profile of a conventional, unsuppressed submachine gun.

The MP5/40 and MP5/10 are product improved variants of the 9mm MP5 chambered for the more powerful .40 S&W and 10mm Auto cartridges. Although the operation and functioning principles of the MP5/40 and MP5/10 are identical to the

9mm MP5, several user inspired improvements have been incorporated into the design, including a new bolt catch device that holds the bolt group rearward after the magazine is empty. New lightweight synthetic magazines are durable and ensure reliable feeding under the most extreme conditions. Like all MP5s, the MP5/40 and MP5/10

can be disassembled without tools for cleaning and maintenance.



MP5/40A2 .40 S&W with with 3-round burst

trigger group




## HK G36 Weapon System

A new development for HK, the G36 is a true modular weapon system in caliber 5.56x45mm NATO (.223 Remington). Constructed almost entirely of a tough, carbon fiber reinforced polymer material and using a simple, self-regulating gas system, the G36 provides the user with a lightweight weapon that delivers high performance with extremely low maintenance. The barrel of the G36 can be exchanged by unit armorers to create a rifle, carbine, or light support variant using the same common receiver. Exhaustively tested and currently fielded with the German Armed Forces (including the new NATO Rapid Reaction Force), the G36 is now available to U.S. law enforcement and military customers.

G36 barrels can be easily removed by the unit armorer with a special torque wrench.

Chrome-plated, cold hammer forged barrel with 1 in 7 inch twist rifling

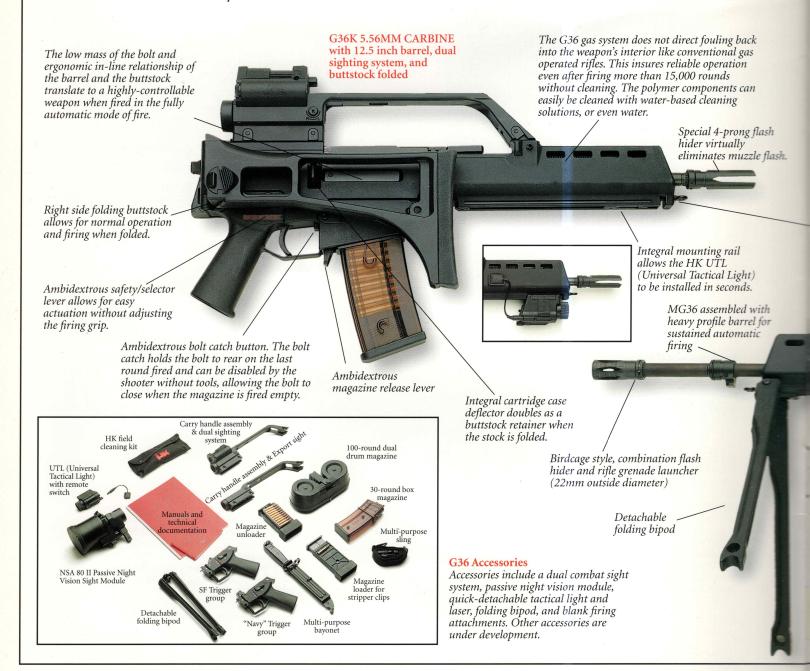



### **HK Rifles & Carbines**

Heckler & Koch rifles and carbines are recognized as the most technologically and tactically advanced weapons in the world. Reliability, modular construction, a true "system" approach, and a complete line of shoulder arms and accessories make HK the world leader in tactical armament.

Using the robust and reliable delayed blowback roller-locked bolt operating system first developed by HK engineers for

Cold-hammer forged barrel ensures unmatched accuracy and service life

Accessory claw-lock scope mount and telescopic sight. HK scope mounts attach to rifles and submachine guns without tools at special points that ensure 100% return to zero. HK scope mounts do not interfere with the use of the weapon's iron sights.

the G3 automatic rifle,

Heckler & Koch has created a variety of weapons designed to meet any tactical need. The HK33,

HK33K, and HK53 are refinements of the delayed blowback roller-locked bolt operating system into weapons firing the proven and

popular 5.56mm x 45mm NATO (caliber .223) round.

Common throughout each weapon group is the ability to use many interchangeable assembly groups and components. This provides the ability to train personnel within one weapon group and have them competent with the entire weapon system.

HK33KA2 5.56MM CARBINE with 12.7 inch barrel and "0-1-25" trigger group

The G3K is a compact carbine-sized weapon firing the full power 7.62 x 51mm cartridge.

G3KA4 7.62MM CARBINE with 12.4 inch barrel and "0-1-20" trigger group

Battle-proven rotary diopter sights common to most HK long guns.

Standard assault rifle of the German Bundeswehr since 1959 and used by more than fifty nations.

20-round

7.62mm magazine

0



# **HK Special Application Products**

Critical tactical situations call for specialized products designed to meet unique demands. HK's extensive line of special purpose products include precision marksman rifles, light and general purpose machine guns, shotguns, grenade launchers, and signalling devices.





#### Accessories

An extensive line of accessories is available for Heckler & Koch weapons. Designed and manufactured to the same exacting standards, HK accessories add functionality and highlight the true systems approach used in developing these firearms. A variety of instructional aids including wall charts, posters, and video tapes are also available.

Contact Heckler & Koch, Inc. for more information.




#### **Pistol Accessories**





#### **Cleaning Kits**

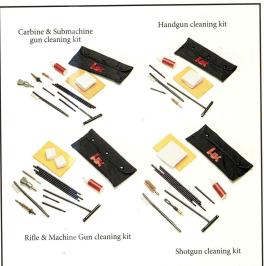

#### **Accessories for Special Application Products**

#### **Submachine Gun Accessories**



| <b>SPECIFICATIONS</b>                |           |   |                       |         |           |               |         |                     |                 |              |            |                 |
|--------------------------------------|-----------|---|-----------------------|---------|-----------|---------------|---------|---------------------|-----------------|--------------|------------|-----------------|
|                                      |           | cyclic                                  | magazine              | modes   |           |               | width*1 | height <sup>2</sup> | weight (pounds) | sight radius | barrel     | overall         |
|                                      | caliber   | rate of fire                            | capacity              | of fire | sights    | stocks        | (in.)   | (in.)               | (w/o magazine)  | (in.)        | length (in | .) length (in.) |
| P7M8                                 | 9ммх19    | -                                       | 8                     | S       | 3-DOT     | -             | 1.14    | 5.10                | 1.72            | 5.83         | 4.13       | 6.73            |
| P7M13                                | 9ммх19    |   | 13                    | S       | 3-DOT     | -             | 1.30    | 5.30                | 1.87            | 5.83         | 4.13       | 6.90            |
| USP9                                 | 9ммх19    | -                                       | 10/15                 | S       | 3-DOT     | -             | 1.26    | 5.35                | 1.65            | 6.22         | 4.25       | 7.64            |
| USP40                                | .40 S&W   | -                                       | 10/13                 | S       | 3-DOT     |               | 1.26    | 5.35                | 1.66            | 6.22         | 4.25       | 7.64            |
| USP45                                | .45 ACP   | -                                       | 10/12                 | S       | 3-DOT     |               | 1.26    | 5.55                | 1.74            | 6.34         | 4.41       | 7.87            |
| USP9 Compact                         | 9ммх19    | - 1                                     | 10/13                 | S       | 3-DOT     | 1-            | 1.14    | 5.00                | 1.47            | 5.35         | 3.58       | 6.81            |
| USP40 Compact                        | .40 S&W   | -                                       | 10/12                 | S       | 3-DOT     | -             | 1.14    | 5.00                | 1.53            | 5.35         | 3.58       | 6.81            |
| USP357 Compact                       |           | - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 | 10/12                 | S       | 3-DOT     |               | 1.14    | 5.00                | 1.53            | 5.35         | 3.58       | 6.81            |
| USP45 Compact                        | .45 ACP   | -                                       | 8                     | S       | 3-DOT     |               | 1.14    | 5.06                | 1.60            | 5.63         | 3.80       | 7.09            |
| Mark 23                              | .45 ACP   | -                                       | 10/12                 | S       | 3-DOT     | - 1           | 1.53    | 5.90                | 2.42            | 7.76         | 5.87       | 9.65            |
| USP45 Tactical                       | .45 ACP   |   | 10/12                 | S       | TARGET    | -             | 1.26    | 5.90                | 1.90            | 6.34         | 4.92       | 8.64            |
| EFL                                  | 19мм      |   | 5                     | M       | -         |               | 1.45    | 5.75                | .49             | -            |            | 3.15            |
| P2A1                                 | 26.5мм    | -                                       | <u> - 100</u>         | M       | -         | -             | 1.50    | 5.70                | 1.50            | -            | 6.10       | 7.90            |
| MP5A2                                | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | FS            | 1.96    | 8.26                | 5.59            | 13.38        | 8.85       | 26.77           |
| MP5A4                                | 9ммх19    | 800 RPM                                 | 15/30                 | S, 3, F | D         | FS            | 1.96    | 8.26                | 5.59            | 13.38        | 8.85       | 26.77           |
| MP5A3                                | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | RS            | 1.96    | 8.26                | 6.47            | 13.38        | 8.85       | 21.00/27.25     |
| MP5A5                                | 9ммх19    | 800 RPM                                 | 15/30                 | S, 3, F | D         | RS            | 1.96    | 8.26                | 6.47            | 13.38        | 8.85       | 21.00/27.25     |
| MP5SFA2(* 3)                         | 9ммх19    | -                                       | 15/30                 | S       | D         | FS            | 1.96    | 8.26                | 5.61            | 13.38        | 8.85       | 28.00           |
| MP5SFA3(*3)                          | 9ммх19    | 7 -                                     | 15/30                 | S       | D         | RS            | 1.96    | 8.26                | 6.49            | 13.38        | 8.85       | 22.33/28.58     |
| MP5-N(FS)                            | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | FS            | 1.96    | 8.26                | 5.59            | 13.38        | 8.85       | 26.77           |
| MP5-N(RS)                            | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | RS            | 1.96    | 8.26                | 6.47            | 13.38        | 8.85       | 21.00/27.25     |
| MP5K                                 | 9ммх19    | 900 RPM                                 | 15/30                 | S, F    | D         | -             | 1.96    | 8.26                | 4.40            | 10.25        | 4.50       | 12.80           |
| MP5KA4                               | 9ммх19    | 900 RPM                                 | 15/30                 | S, 3, F | D         | -             | 1.96    | 8.26                | 4.40            | 10.25        | 4.50       | 12.80           |
| MP5K-N                               | 9ммх19    | 900 RPM                                 | 15/30                 | S, F    | D         | -             | 1.96    | 8.26                | 4.40            | 10.25        | 5.50       | 13.75           |
| MP5K-PDW                             | 9ммх19    | 900 RPM                                 | 15/30                 | S, F    | D         | FOLDING       | 1.96    | 8.26                | 6.14            | 10.25        | 5.50       | 14.50/23.75     |
| MP5/10A2                             | 10мм Аито | 800 RPM                                 | 30                    | S, F    | D         | FS            | 1.96    | 8.26                | 5.88            | 13.38        | 8.85       | 26.77           |
| MP5/10A3                             | 10мм Аито | 800 RPM                                 | 30                    | S, F    | D         | RS            | 1.96    | 8.26                | 6.41            | 13.38        | 8.85       | 21.00/27.25     |
| MP5/40A2                             | .40 S&W   | 800 RPM                                 | 30                    | S, F    | D         | FS            | 1.96    | 8.26                | 5.88            | 13.38        | 8.85       | 26.77           |
| MP5/40A3                             | .40 S&W   | 800 RPM                                 | 30                    | S, F    | D         | RS            | 1.96    | 8.26                | 6.41            | 13.38        | 8.85       | 21.00/27.25     |
| MP5SD1                               | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | RC ·          | 2.36    | 8.26                | 6.17            | 13.38        | 5.73       | 21.67           |
| MP5SD2                               | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | FS            | 2.36    | 8.26                | 6.83            | 13.38        | 5.73       | 30.42           |
| MP5SD3                               | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | RS            | 2.36    | 8.26                | 7.63            | 13.38        | 5.73       | 25.68/31.69     |
| MP5SD4                               | 9ммх19    | 800 RPM                                 | 15/30                 | S, 3, F | D         | RC            | 2.36    | 8.26                | 6.17            | 13.38        | 5.73       | 21.67           |
| MP5SD5                               | 9ммх19    | 800 RPM                                 | 15/30                 | S, 3, F | D         | FS            | 2.36    | 8.26                | 6.83            | 13.38        | 5.73       | 30.42           |
| MP5SD6                               | 9ммх19    | 800 RPM                                 | 15/30                 | S, 3, F | D         | RS            | 2.36    | 8.26                | 7.63            | 13.38        | 5.73       | 25.68/31.69     |
| MP5SD-N                              | 9ммх19    | 800 RPM                                 | 15/30                 | S, F    | D         | RS            | 2.36    | 8.26                | 7.83            | 13.38        | 5.73       | 25.68/31.69     |
| HK53A2                               | 5.56мм    | 700 RPM                                 | 25/30                 | S, F    | D         | FS            | 2.05    | 8.26                | 5.96            | 15.40        | 8.31       | 29.72           |
| HK53A3                               | 5.56мм    | 700 RPM                                 | 25/30                 | S, F    | D         | RS            | 2.05    | 8.26                | 6.73            | 15.40        | 8.31       | 22.17/29.72     |
| HK33KA2                              | 5.56мм    | 700 RPM                                 | 25/30                 | S, F    | D         | FS            | 2.28    | 8.26                | 8.05            | 18.89        | 12.68      | 34.06           |
| HK33KA3                              | 5.56мм    | 700 RPM                                 | 25/30                 | S, F    | D         | RS            | 2.28    | 8.26                | 8.82            | 18.89        | 12.68      | 26.38/34.06     |
| HK33A2                               | 5.56мм    | 750 RPM                                 | 25/30                 | S, F    | D         | FS            | 2.28    | 8.26                | 8.40            | 18.89        | 15.35      | 36.20           |
| HK33A3                               | 5.56мм    | 750 RPM                                 | 25/30                 | S, F    | D         | RS            | 2.28    | 8.26                | 8.80            | 18.89        | 15.35      | 29.15/36.20     |
| HK23E                                | 5.56мм    | 800 RPM                                 | BELT OR 25/30         | S, 3, F | D         | FS            | 5.24    | 8.26                | 19.18           | 26.97        | 17.72      | 40.55           |
| G36K(* 4)                            | 5.56мм    | 750 RPM                                 | 30/100                | S, F    |           | FOLDING       | 2.44    | 9.72                | 6.62            | -            | 12.52      | 24.21/33.78     |
| G36 <sup>(* 4)</sup>                 | 5.56мм    | 750 RPM                                 | 30/100                | S, F    |           | FOLDING       | 2.44    | 9.72                | 7.28            | -            | 18.90      | 29.84/39.29     |
| MG36 <sup>(* 4)</sup>                | 5.56мм    | 750 RPM                                 | 30/100                | S, F    | O, DS     | FOLDING       | 2.44    | 11.42               | 7.87            | -            | 18.90      | 29.84/39.29     |
| G3A3                                 | 7.62мм    | 600 RPM                                 | 5/20                  | S, F    | D         | FS            | 2.28    | 8.26                | 9.70            | 22.52        | 17.71      | 40.38           |
| G3A4                                 | 7.62мм    | 600 RPM                                 | 5/20                  | S, F    | D         | RS            | 2.28    | 8.26                | 10.40           | 22.52        | 17.71      | 33.10/40.15     |
| G3KA3                                | 7.62мм    | 600 RPM                                 | 5/20                  | S, F    | D         | FS            | 2.28    | 8.26                | 9.00            | 20.00        | 12.40      | 35.25           |
| G3KA4                                | 7.62мм    | 600 RPM                                 | 5/20                  | S, F    | D         | RS            | 2.28    | 8.26                | 9.70            | 20.00        | 12.40      | 28.00/35.25     |
| HK21E                                | 7.62мм    | 800 RPM                                 | BELT OR 20/50         | S, 3, F | D         | FS            | 5.24    | 8.26                | 20.50           | 26.97        | 22.05      | 44.88           |
| PSG1                                 | 7.62мм    |   | 5/20                  | S       | O, 6x, H  | ASS           | 2.32    | 10.16               | 17.86           | 10x scope    | 25.59      | 47.56           |
| MSG90                                | 7.62мм    |   | 5/20                  | S       | O, 10x, H |               | 2.56    | 10.23               | 14.11           | 6x scope     | 23.62      | 45.87           |
| HK69A1                               | 40мм      | -                                       | -                     | M       | LADDER    | RS            | 2.25    | 8.00                | 5.77            | 13.50        | 14.00      | 18.24/28.90     |
| FP6                                  | 12 gauge  | Mile :                                  | 5                     | PUMP    |           | FS, FOLDING   | 2.25    | 8.10                | 6.60            | -            | 20.00      | 31.00/41.25     |
| buttstock open  Modes of fire: M = n |           |   | der *specifications s |         |           | E fully outer | matic   |                     |                 |              |            | stock in/out    |

 $\textbf{Modes of fire:} \ \ M-manually \ operated, \ S-semiautomatic, \ 2-2 \ round \ burst, \ 3-3 \ round \ burst, \ F-fully \ automatic$ 

Buttstock Configurations: RC – receiver cap, FS – fixed stock, RS – retractable stock, ASS – adjustable sniper stock

Sights: O – optical sight, H – Hensoldt scope, D – diopter/rotary, X – magnification, DS – dual sighting system

State and local law enforcement customers, please direct all inquiries to the HK Law Enforcement Sales Department, (703) 450-1900 extensions 272, 289, & 290.

Federal agencies and DOE/NRC contractors, please direct all inquiries to the HK Federal Law Enforcement Staff, (703) 450-1900 extension 205.

Military services, please direct all inquiries to the HK Military Sales Department, (703) 450-1900 extension 209.

Specifications and model available of the HK Military Sales Department, (703) 450-1900 extension 209.