


SP5 Caliber 9 mm x 19

NEW PRODUCT

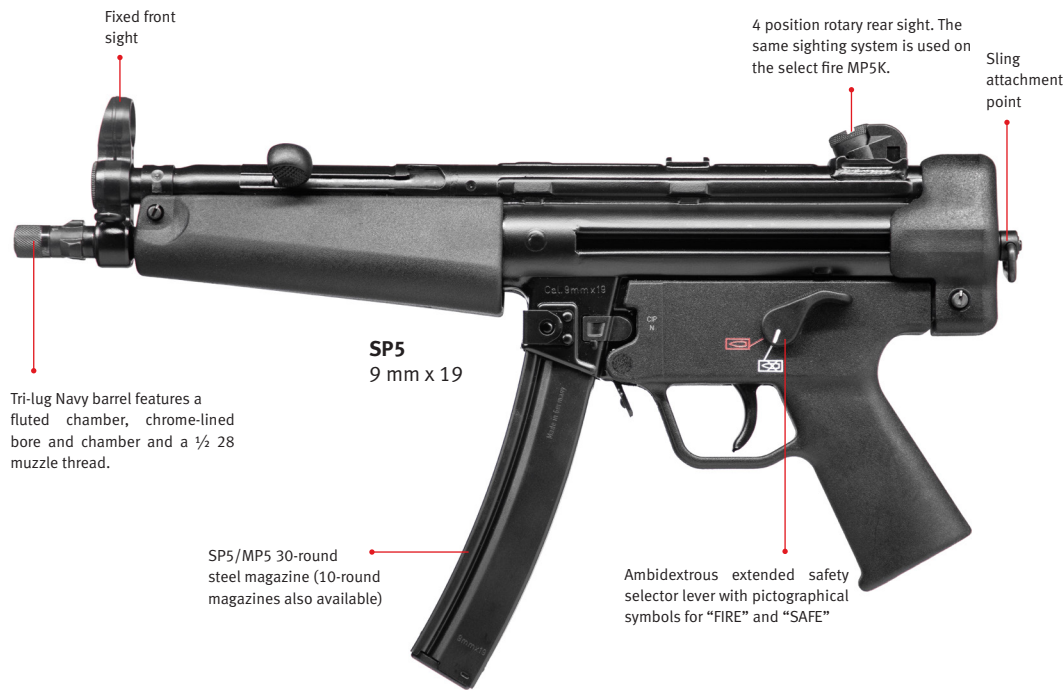

DELAYED ROLLER LOCK

The SP5 uses the delayed roller locked blowback operating system found on MP5 models — famous for its reliability, accuracy, and safe functioning.



PADDLE MAGAZINE RELEASE

The SP5 uses the same paddle magazine as the MP5.



SP5 DURABLE CASE

The SP5 comes in a soft case with a custom fit for the pistol, sight tool, two 30-rd magazine and sling.

CONFIGURATIONS AVAILABLE

- SP5 9mm with two 30rd magazines - **81000477** (UPC 642230259829) **MSRP \$2799**
- SP5 9mm with two 10rd magazines - **81000478** (UPC 642230259812) **MSRP \$2799**
- Magazine, SP5, 9mm, 30 rounds - **2063495** (UPC 642230254336) **MSRP \$80**
- Magazine, SP5, 9mm, 15 rounds - **2156105** (UPC 642230251809) **MSRP \$80**
- Magazine, SP5, 9mm, 10 rounds - **2392575** (UPC 642230255210) **MSRP \$80**



The SP5 was developed by Heckler & Koch as a semiautomatic, civilian sporting pistol that matches the look and feel of the legendary MP5 submachine gun.

Designed and manufactured to meet the definition of a civilian pistol, the SP5 is loaded with authentic features, like a Navy barrel with threaded tri-lug adaptor, paddle magazine release, fluted chamber and chrome-lined bore.

The backbone of the SP5 is the roller-delayed blowback operating system, which is legendary for its accuracy, reliability, and smooth shooting dynamic. Originally perfected on the Heckler & Koch G3 rifle, it has been used on several other HK firearms still serving today around the world.

The SP5 is manufactured in Heckler & Koch's Oberndorf factory in southwest Germany. It retains many of the critical elements of the MP5, including its precision-machined components and attention to detail. This high level of quality and workmanship is a result of making the SP5 in the same factory, on the same lines, and by the same workforce that has been making MP5s for years.

For more comfortable shooting, the SP5 is equipped with an elastic "bungie" sling. The sling is easily installed by snapping it onto the sling swivel hardware located on the rear of the receiver. Using the sling makes firing the SP5 more stable and reduces fatigue.

SP5 Specifications

Caliber	9mm x 19
Operating Principle	Recoil operated
Locking System	Roller-delayed blowback
Magazine Capacity	30/15/10 rounds
Cartridge case ejection	Right side

Dimensions

Length	17.8 inches / 452 mm
Width	2.48 inches / 63 mm
Height	8.66 inches / 220 mm
Barrel length	8.86 inches / 225 mm

Weight

Weight (without magazine)	5.1 lb (2500 grams)
Magazine Weight Empty	30rd-6.3 oz/180 g, 10rd-3.5 oz/110 g

Other

Trigger pull	6.74-10.11 pounds-force / 30-45 N (approximate)
Return Travel	.12 inches / 3 mm
Trigger Travel	.24 inches / 6 mm
Sight Radius	13 inches / 330 mm
Barrel Profile/Twist	Groove/land profile, 6 grooves, right-hand twist
Sights	Rotary rear sights, 4 positions



HECKLER & KOCH / 5675 Transport Blvd. / Columbus, GA 31907 USA / Tel: 706-568-1906 / Fax: 706-568-9151 / www.hk-usa.com